



STANDARD EQUIPMENT FOR BASE MACHINE 基础设备标准

- Air cleaner, double element with dust indicator
空气滤清器，带灰尘报警器的双元件
- Alternator, 35 ampere/24V
交流发电机，35A/ 24V
- Batteries, 195 Ah/2 x 12V
电池，195Ah / 2 x 12V
- Belt drive cooling fan 皮带传动冷却风扇
Decelerator pedal 减速器踏板
- Engine hood 发动机罩
- Engine side covers, vertically opened
发动机侧护罩，平开
- Lighting system, (includes 4 front, 2 rear)
照明系统（包括前4个，后2个）
- Locks, filler caps and covers
锁，加注帽和盖子
- Manuel operation, hydraulic boost
手动操纵，液压助力
- Radiator guard door, flat
散热器防护门，平坦
- Radiator reserve tank 散热器储罐
Rear cover后盖
- ROPS mounting brackets ROPS 安装支架
Starting motor, 11kW/24V
启动电机，11 kW / 24V
- Seat, adjustable 可调节座椅
- Track roller guard, end sections
滚轮保护装置，端部
- Track shoe assembly 履带板总成
- —Heavy-Duty sealed and lubricated track
重型密封和润滑履带
- 560 mm 22" single grouser shoe
560毫米22" 单履带履带板
- Underguards, oil pan and transmission
保护罩，油底壳和传动装置
- Wet, multi-piece, spring compression, hydraulically separated steering clutch
湿式、多片、弹簧压紧、液压分离转向离合器

STEEL CAB 钢结构驾驶室

- Additional weight 430kg 附加重量430kg
- All-weather, enclosed steel structure A/C cab 适应各种天气的钢结构空调驾驶室
- Dimensions: 尺寸

—Length: 1680mm 长度: 1680毫米
—Width: 1464mm 宽度: 1464毫米
—Height: 1668mm 高度: 1668毫米
—Height from floor to ceiling: 1518mm 车顶天花板离地高度: 1518毫米



ROPS CANOPY FOR CAB 驾驶室ROPS遮篷

- Additional weight 1050kg 附加重量1050千克
- Meets ISO 3471, SAE J/ISO 3471 ROPS 符合ISO3471标准、SAE J/ISO 3471ROPS 标准和ISO3449FOPS标准
- standards, and ISO 3449 FOPS standard.
- Roof dimensions: 车顶尺寸 —Length: 2183mm 长度: 2183毫米
—Width: 2310mm 宽度: 2310毫米
—Height from operator compartment floor: 2056mm 操作间地板至车顶高度: 2056mm



TRIPLE-SHANK RIPPER 三齿松土器

- Additional weight (including hydraulic control unit): 4382 kg 附加重量 (包括液压控制单元) : 4382千克
- Beam length: 1166 mm 横梁长度: 1166毫米
- Maximum digging depth: 1250mm 最大挖掘深度: 1250毫米
- Maximum lift above ground: 955 mm 最大离地举升高度: 955毫米

SHOES 履带板

Shoe width 履带板宽度	Total ground contact area 接地面积
560 mm 22.0" single-grouser shoe 单凸履带板	3.53 m ²

地址：内蒙古包头市青山区民主路
电话：0472-3117006 (整机) / 86-472-3117687 (国外) 0472-3118853 (配件)
传真：0472-3117851
邮政编码：014032
网址：www.ddgcjx.com

Net 功率净值: 235kw 320HP @ 2000rpm
Gross 功率毛值: 257kw 320HP @ 2000rmp
OPERATING WEIGHT 操作质量35700kg

TY320D 推土机



The Cummins QSNT-C345 diesel engine provides an output of **235 kW** 320 HP with excellent productivity.

康明斯QSNT-C345柴油发动机的输出功率为
235 kW 320 HP，生产效率极高。

Vertically opened engine side cover for easy and safer servicing.

平开发动机侧盖使维修更简单更安全

High capacity **Straight tilt dozer** combined the highest power in its class with outstanding productivity.

高容量直推式推土机将同类产品中的最高功率与出色的生产力相结合

Left hand **joystick** controls all tractor motion. Right hand joystick controls all the movements of blade and ripper.

左手操纵杆控制推土机的所有动作。右手操纵杆控制土铲及松土器的所有动作。

Electronic monitoring system prevents minor problems from developing into major ones.

电子监控系统防止小问题扩大化

Net 功率净值：
235kw 320HP @2000rpm

Gross 功率毛值：
257kw 345HP @2000rmp

OPERATING WEIGHT 操作质量：
35700kg

BLADE CAPACITY 推土铲容量
Straight Tilt Doze
直倾式推土铲: **11.7m³**



Wet, multiple-disc brakes Eliminates brake-band adjustments for maintenance-free operation

湿式多片制动器消除制动带的调整，以便进行免维护操作

Bolt-on segmented sprocket teeth
螺栓固定的分段链轮齿便于现场更换

Photo may include optional equipment.

All steering, direction, and speed changes are made by three joysticks on the left-hand. If the operator wants to move the machine the front left, he simply pulls the first left joystick back. If the operator wants to turn the machine to the front right, he simply pulls the third left joystick back.

所有转向，方向和速度变化都由左手的三个操纵杆控制。如果操作员想要将机器向前左转向，他只需将左边第一个操纵杆向后拉动即可。如果操作员想要将机器向前右转向，他只需将左边第三个操纵杆向后拉动即可。

Low-noise design

低噪音设计

For smoother riding comfort, power train components and hydraulic control valves are mounted to the frame with rubber pads to soften vibration and shut out noise. The walk-through operator compartment is uncluttered for smooth entry and exit. An adjustable seat with backrest is standard equipment.

为了更顺畅的乘坐舒适性，动力传动系部件和液压控制阀通过橡胶垫安装到车架上，以减轻振动并隔绝噪音。操作员操作室整齐划一，便于进出。标准配备带靠背的可调座椅。



Three-stage height adjustable armrests

三段高度可调的扶手

Three-stage height adjustable arm rests and relocated fuel control lever provide comfortable operation and increased leg space.

三段高度可调的扶手和重新定位的燃油控制杆提供舒适的操作和增加的腿部空间。

Electronic monitoring system

电子监控系统

An electronic monitoring system prevents minor problems from developing into major ones. All meters and gauges are controlled by a microcomputer, which provides a wide indication range for an easier, more precise reading.

电子监控系统可以防止小问题发展成为主要问题。所有仪表均采用国外知名品牌VDO监控系统，以便读取更加简单，更精确。



Steering functions (left hand)

转向功能（左手）

Forward and reverse Steering functions and speed control
转向功能及速度操纵

Realize the turning to left and to right
可实现车辆向左和向右转

Realize the turning forward and reverse, from first, to second, to third shifting
可实现车辆前进和倒退，一档到二挡到三挡

Blade functions (right hand)

推土铲功能（右手）

Straight tilt dozer
直推式推土机

Front joystick controls lift and tilt of blade
前操纵杆控制铲刀升降、倾斜

Rear joystick controls lift of ripper
后操纵杆控制松土器升降

Field-proven engine

经现场验证的发动机

Powerful QSNT-C345 diesel engines provides a massive output of 235 kW 320 HP. The engine power is transmitted smoothly to the final drives via a high-efficiency torque converter.

功能强大的QSNT-C345柴油发动机可提供235千瓦320马力的大功率输出。发动机动力通过高效率的扭矩平稳地传递到最终传动

Sturdy design

坚固的设计

Because fewer components mean greater reliability, we've designed a simple hull frame made of a thick, single plate. Track frames have a large-section construction for maximum rigidity. Even the box-section construction of the blade back beam is reinforced, all with durability in mind.

因为更少的组件意味着更高的可靠性，我们设计了一个由厚厚的单板制成的简单船体框架。

履带框架采用大截面结构，可实现最大刚性。即使是刀背梁的箱形截面结构也得到了加强，所有这些都考虑到耐久性。

Flat bottom frame

平底框架

A flat bottom frame, the monocoque track frames and forward-mounted pivot shafts provide good maneuverability in muddy terrain by preventing mud from building up under the frame.

平底框架，承载式履带架和前部安装的枢轴通过防止泥浆在框架下堆积而在泥泞的地形中提供良好的可操作性。



Wet, multiple-disc brakes

Eliminate brake-band adjustments for maintenance-free operation.

湿式多盘式制动器消除制动带调整，实现免维护运行。



Oil pressure check ports

油压检查端口

Oil pressure check ports for the power train are centralized on the right hand side of the operator

动力传动系的油压检查端口集中在操作员的右侧踏板下

Front radiator door

前散热器防护门

Openable and closable radiator mask facilitates radiator cleaning.

可打开和可关闭的散热器面罩有助于清洁散热器。





ENGINE 发动机

Model 型号.....Cummins QSNT-C45
 Type 类型.....4-stroke cycle, water-cooled, direct injection
 4冲程循环、水冷、直喷
 Aspiration 增压.....Turbocharged 涡轮增压
 Number of cylinders 油缸数量.....6
 Bore x stroke. 孔*冲程.....139.7 mm x 152.4 mm
 Piston displacement 活塞排量.....14 ltr 升
 Gross power 毛功率.....257kW (345HP)
 Net power 净功率.....235kW (320HP)
 Rated rpm 额定转速.....2000rpm
 Fan drive type 风扇驱动器类型.....Mechanical 机械式
 Lubrication system 润滑系统
 Method 方法.....Gear pump, forced lubrication 齿轮泵、强制润滑
 Filter 过滤器.....Full-flow 全流量
 Net maximum torque 最大净扭矩.....1509 N · m /1400 rpm



TRANSMISSION SYSTEM 传动系统

Torque converter:
 three components, one grade and one phase
Central drive:
 spiral bevel gear, first stage deceleration, splash lubrication
Steering clutch:
 wet, multi-piece, spring-loaded, hydraulically separated
Steering brakes:
 Wet, floating, direct clutch, hydraulic assist brake
Final drive:
 secondary spur gear reduction, splash lubrication
 液力变矩器：三元件、一级一相
 中央传动：螺旋锥齿轮、一级减速、飞溅润滑
 转向离合器：湿式、多片、弹簧压紧、液压分离
 转向制动器：湿式、浮式、直接离合、液压助力制动
 终传动：二级直齿轮减速、飞溅润滑

Minimum turning radius*:最小转弯半径*.....3940mm
 *As measured by track marks on ground. *以地面上的履带标记
 测量。



UNDERCARRIAGE 下车

Suspension 悬挂.....Eight-beam swing, balanced beam suspension structure 八字梁摆动式、平衡梁悬挂结构
 Track roller frame 滚筒架.....Monocoque, large section, durable construction 承载式，大截面，耐用结构
 Track shoes.履带板
 Lubricated track. A unique dust seal prevents external abrasive material from entering the pin bushing gap for extended life.
 Easy adjustment of track tension with a grease gun.

润滑的履带。独特的防尘密封件可防止外部磨损性物质进入销轴衬套间隙，从而延长使用寿命。使用黄油枪可以轻松调整履带张力。
 Number of carrier rollers (each side) (每边) 托运轮数量.....2
 Number of track rollers (each side) (每边) 支重轮数量.....7
 Number of shoes (each side) (每边) 履带板的数量.....41
 Grouser height 履带高度.....80mm
 Shoe width 履带板宽度.....560mm
 Track gauge 轨距.....2140mm
 Length of track on ground 地面履带轨长度.....3150mm
 Ground contact area 接地面积.....3.53m²
 Ground pressure.接地比压.....0.104mPa



OPERATING WEIGHT (APPROXIMATE) 操作质量 (近似值)

Tractor weight: 推土机重量
 Gearbox: planetary gear, multi-plate clutch, hydraulic combined with forced lubrication
 变速箱：行星齿轮，多片离合器、液压结合强制润滑式。

Travel speed 行驶速度	Forward 前进	Reverse 后退
1st (km/h)	0 - 3.6	0 - 4.4
2nd (km/h)	0 - 6.6	0 - 7.8
3rd (km/h)	0 - 11.5	0 - 13.5



COOLANT AND LUBRICANT 冷却剂和润滑剂

Including rated capacity of lubricant, coolant, full fuel tank, operator and standard equipment
 包括额定容量的润滑油，冷却液，满油箱，操作人员和标准设备.....3100kg

Operating weight 操作质量

Including straight tilt dozer, cab, operator, standard equipment, and rated capacity of lubricants, coolant, and full fuel tank

包括直倾式推土铲，驾驶室，操作员，标准设备和额定容量的润滑油，冷却液和满油箱.....35700kg



DIMENSIONS 尺寸



HYDRAULIC SYSTEM 液压系统

泵的类型.....CBZ4200齿轮泵
 流量 (额定发动机转速下的排放流量)355L/min
 液压油缸.....Double-acting, piston双作用、活塞
 最高工作油压.....13.7Mpa

	Number of cylinders 油缸数量	Bore 孔径
Blade lift 推土铲起升	2	140 mm
Blade tilt 推土铲倾斜	1	225 mm



DOZER EQUIPMENT 推土机设备

Use of high tensile strength steel in moldboard for strengthened blade construction.
 在推板上使用高强度钢材以加固推土铲结构



Control valve 控制阀
 Double spool control valve for mechanical angle power tilt bulldozers.
 用于机械角度动力倾斜推土机的双联阀柱式控制阀。
Positions: 位置:
 -Blade lift 推土铲升降Raise, hold, lower, and float 起升、保持、降低和漂浮
 -Blade tilt 铲刀倾斜Right, hold, and left 向右、保持、向左
 Additional control valve for triple-shank ripper
 用于三齿松土器的附加控制阀
Positions: 位置:
 -Ripper lift 松土器升降Raise, hold, and lower 起升、保持和落下
 Hydraulic oil capacity (refilling): Straight tilt dozer
 液压油容量 (加注) : 直推式推土机90L

	Overall length with dozer 推土机总长度	Blade capacity* 推土铲容量	Blade length x height 推土铲长*高	Maximum lift above ground 离地最大举升高度	Maximum drop below ground 离地最大切土高度	Maximum tilt adjustment 最大倾斜调整	Angling angle 斜向角度	Additional weight 重量
Straight Tilt Dozer 直倾推土机	6880mm	11.7m ³	4130mmx 1590mm	1560mm	560mm	1000mm	-	4520kg

Remarks: * Blade capacities are based on the SAE recommendation practice J1265.
 备注: *推板容量基于SAE推荐惯例J1265。



DIMENSIONS 尺寸

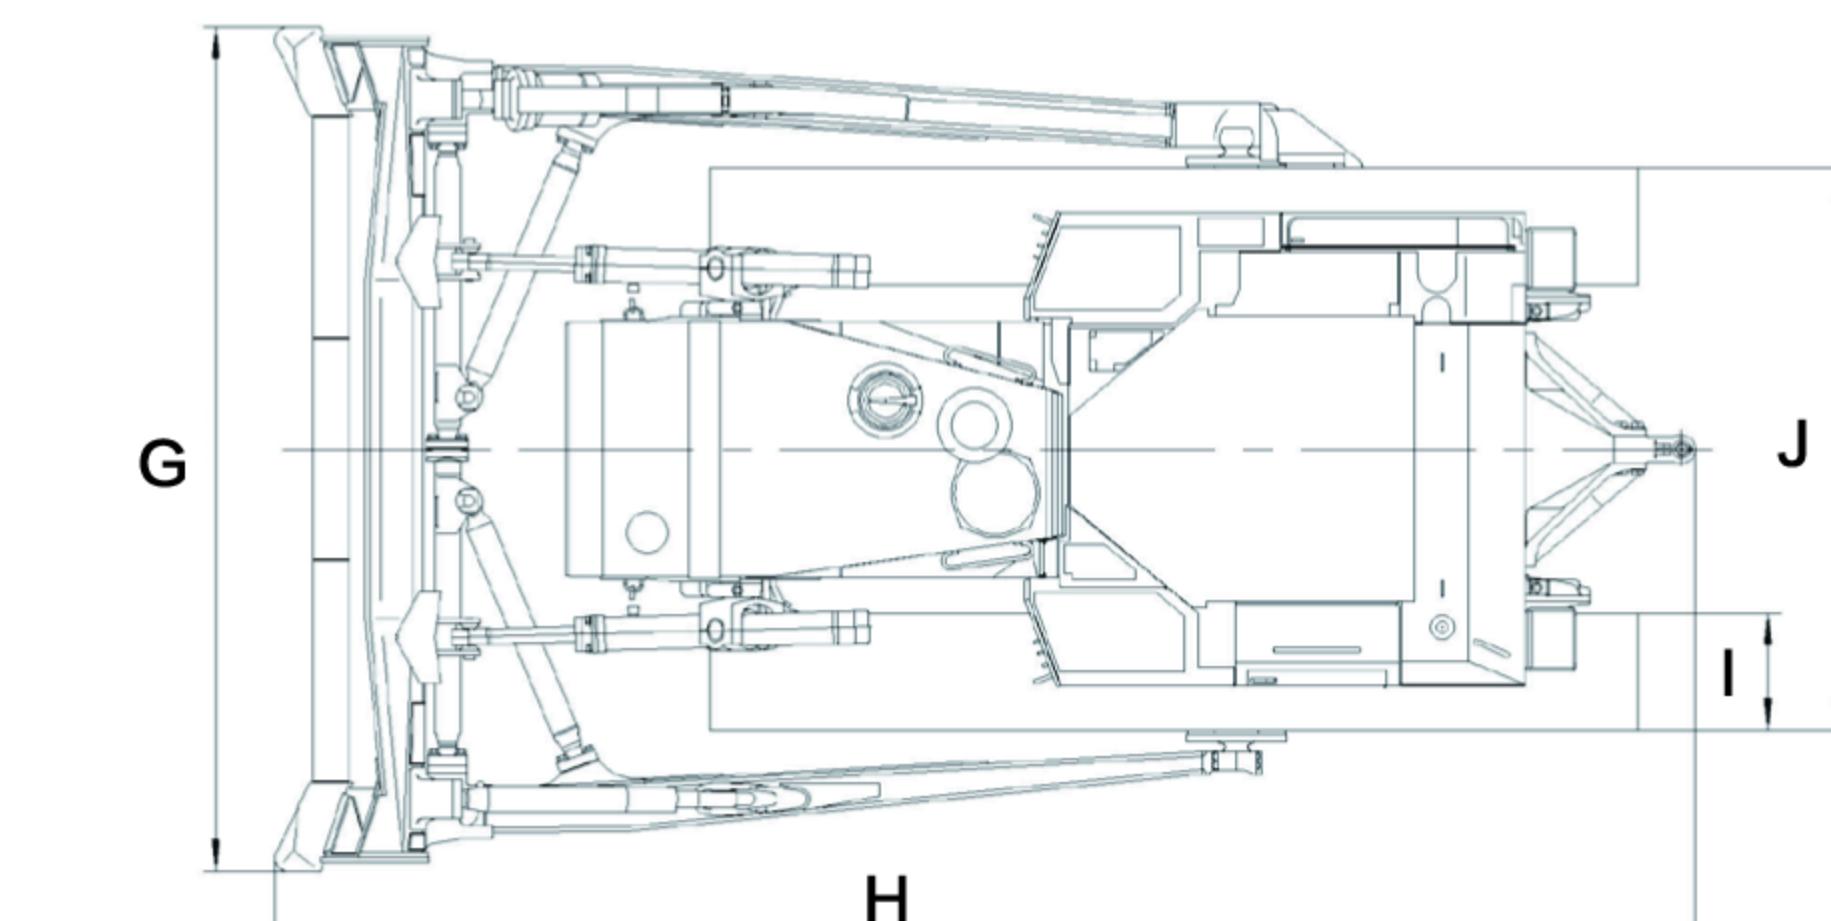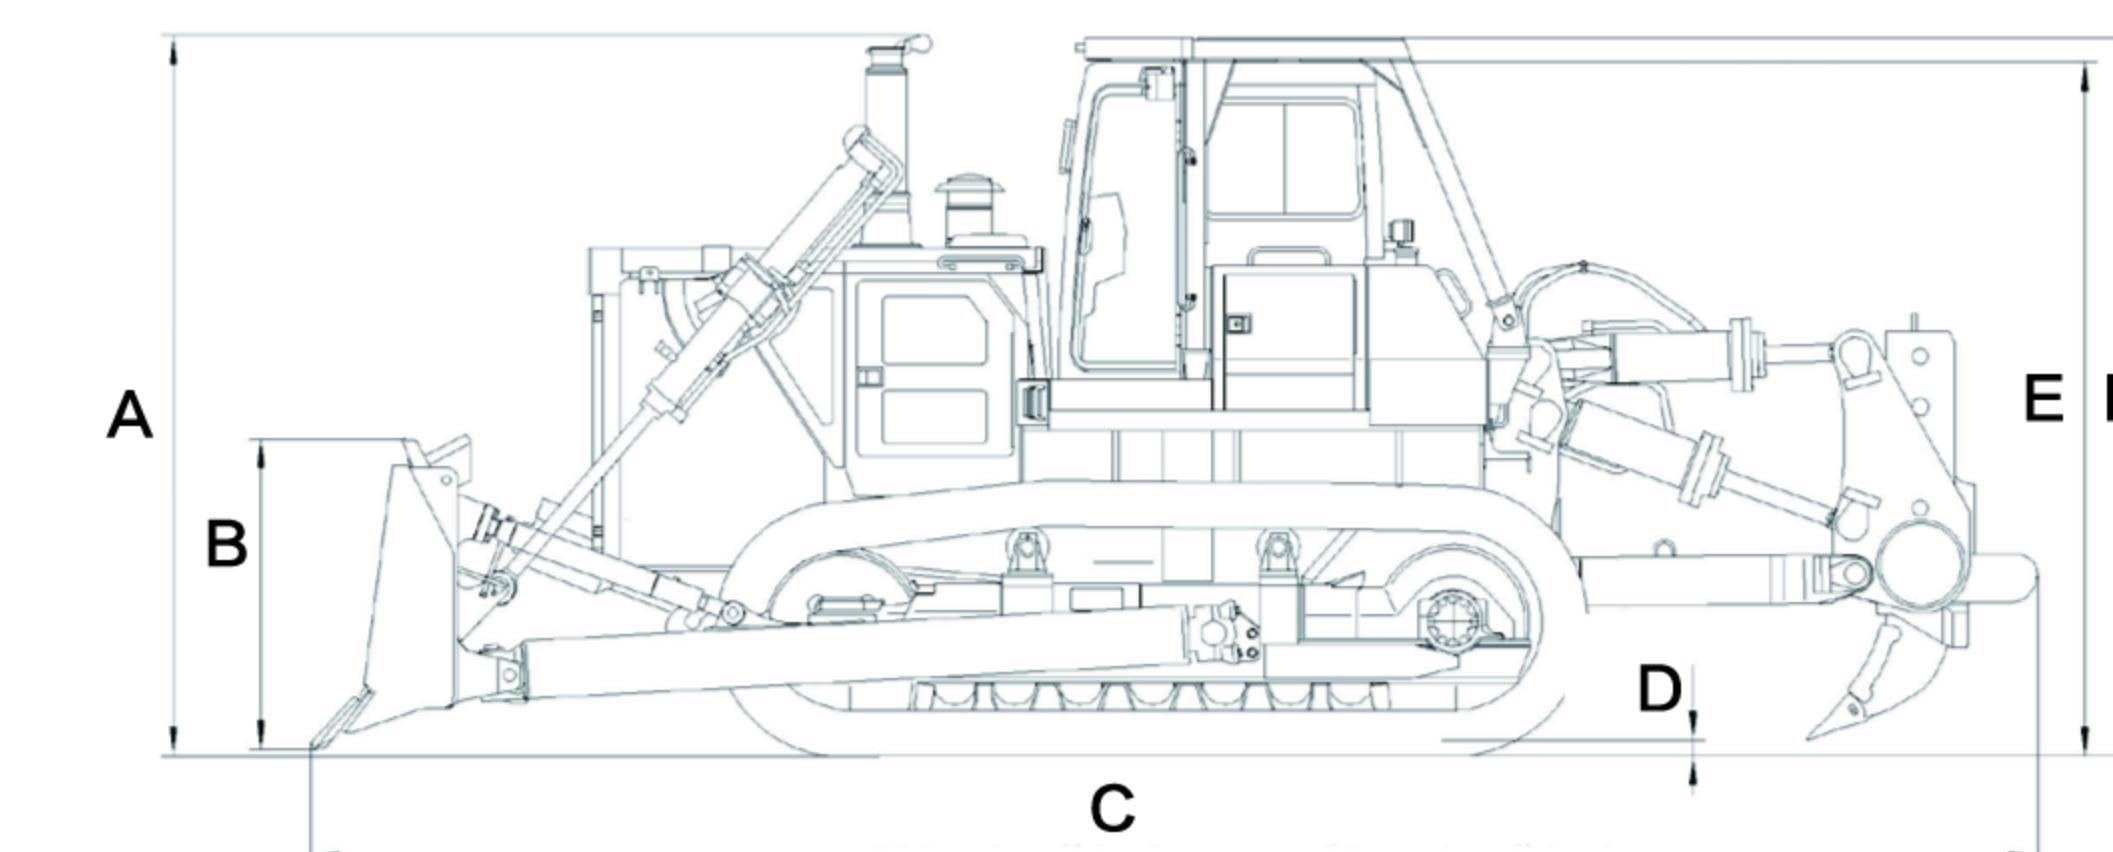

Ground clearance 离地高度.....500mm

A	3709 mm	F	3695 mm
B	1590 mm	G	4130 mm
C	8916 mm	H	6880 mm
D	80 mm	I	560 mm
E	3601 mm		2700 mm